


KFC-P631 **SERVICE MANUAL**



EXTERNAL VIEW

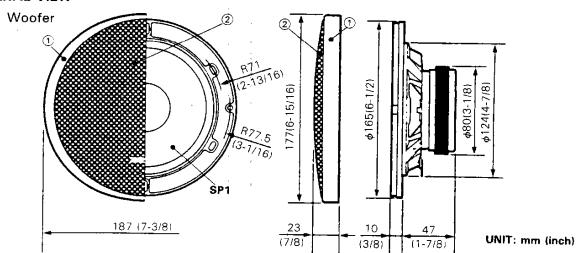

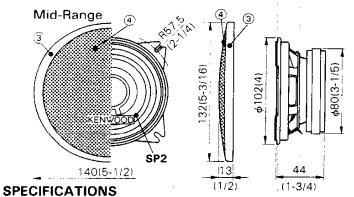



Woofer	,,	16 c
		_

Voofer	16 cm (6 in) PP
	Cone Type
	227 g (8 oz) Magnet
Peak Power	150 Watts
Sensitivity	89 dB/W at 1 m
Frequency Response	45 Hz ~ 8,000 Hz
Impedance	4 Ohms
Weight per Speaker	
with Grille	0.9 kg (2 lb)/Pc.
Aid-Range	10 cm (4 in)

Impedance	4 Ohms	
with Grille	0.9 kg (2 lb)/Pc.	
Mid-Range	10 cm (4 in)	•
	Cone Type 180 g	
	(6.3 oz) Magnet	
Peak Power	150 Watts	
Sensitivity	89 dB/W at 1 m	•
Frequency Response	65 Hz ~ 10,000 Hz	
Resonant Frequency (Fo)	140 Hz	
Impedance	4 Ohms	,

Weight Per Speaker..... 0.53 kg (1.17 lb)/Pc.

*	
Tweeter	2.5 cm (1 in)
	Balanced Dome Type
Peak Power	150 Watts
Sensitivity	93 dB/W at 1 m
Frequency Response	3,500 Hz~
	20,000 Hz
Impedance	4 Ohms
Weight Per Speaker	0.1 kg (0.22 lb)/Pc.

KENWOOD follows a policy of continous advancements in development For this reason specifications may be changed without notice.)